


# MOD PACKAGES NOW!

- >>> Fast Delivery Rush Available
- With SEES and get FREE GROUND FREIGHT!\*
- Call your SEES Sales Manager for more details

\*Subject to change



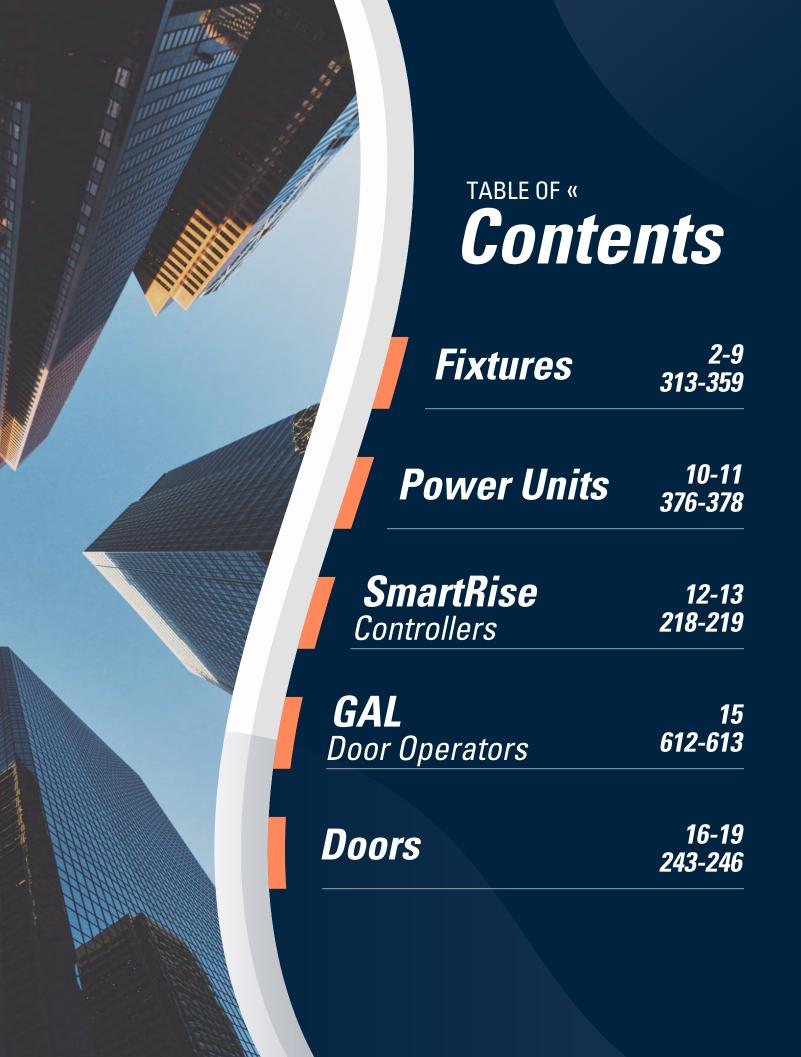



# **CONTACT US** «

**By Phone:** (800) 526-0026 (954) 971-1115

**By Fax:** (954) 917-7337

**By Mail:** 2781 W. McNab Rd. Pompano Beach, FL 33069







### **About SEES**

SEES was founded in 1977 by Richard and Verne Fitzgerald. Richard brought ten years experience in elevator service and construction to the business. Together, they built SEES into the largest independent manufacturer and supplier of replacement parts in the USA. In 2008, Ningbo SEES, our branch in Ningbo, China was established.

SEES has earned the reputation of being the company that offers the best solutions to all industry demands over the last forty years. We are now extending our innovation and superior quality trademark to the world of elevator fixtures.

Our mission is to be the leading elevator parts company in the world by dedicating our resources, talent and energy to help improve the elevator industry.

Always Smooth Sailing






# MADE IN THE U.S.A.

SEES fixtures are produced at the SEES global headquarters in Pompano Beach, FL. As an ISO 9001 Certified Manufacturer, SEES utilizes lean manufacturing techniques and advanced technology to produce top quality products. SEES state of the art machining capabilities allow high-volume parts production as well as the ability for quick turn around times on custom and short run manufacturing. Contact SEES with confidence.



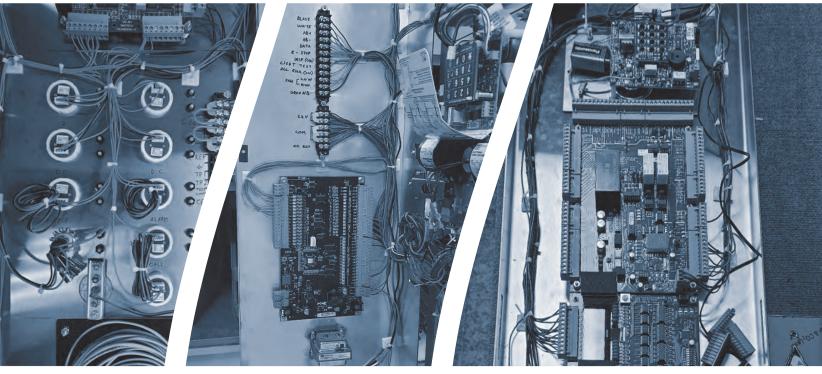



# Always Smooth Sailing





# >> SEES Vandal Resistant Push Buttons

Created for situations where 'standard' or 'typical' just won't do. SEES push buttons add class and durability to your fixtures. The SEES Rhino Series provides vandal resistance, ensuring long-lasting functionality. Multi-volt options are available: 24 - 120 AC/DC.

### >> SEES-PB30-SERIES

Flat, center dot illumination, 24V











Crescent Stainless Marking

# >>> SEES-PB10-SERIES Flat, halo illumination, 24V









Round Stainless Marking

# >>> SEES-PB-30M Convex, dot and halo illumination (Multi-Volt)









Square Stainless Marking



# >>> Additional Button Options

### >> SEES-PB510S-SERIES

Illuminating halo and characters







>> SEES-PB129-SERIES

Illuminating halo and characters







» SEES-PB-22J-B

Polished concave button with illuminating halo







>> COMBINATION OF BUTTONS, BRAILLE AND TACTILE

Center dot illumination and halo illumination



» SEES-PBR-FRR-SERIES

Illuminating halo and characters













# >> Hall Operating Panels

SEES Hall Stations provide value and style to match the elegant finish of our COP's. Our flush mounted series provides a seamless look to any existing lobby or floor design. Our surface mounted series provides an ease of installation to combat any specific challenges due to existing installation conditions.



Flush Mount Terminal



Flush Mount Intermediate



Surface Mount Terminal



# >> Car Operating Panels

With a smart, simple look, our Brushed Stainless Steel Car Operating Panels are an upgrade to any elevator cab. Using Vandal Resistant buttons and premium quality components, our COP's have a trusted look and feel. Whether it is an applied panel or a swing type, our COP's are a reliable option to fit in any cab. Plus, with a variety of buttons, key switches and fire service cabinet options, any modernization project is ensured to be a success.











# >> Hall / Car Lanterns / Position Indicators

With multiple options, SEES Hall & Car Lanterns are customizable to compliment any building design. Combined with our various position indicator options, we can also transform a standard hall lantern into a unique and elegant display. With our ISO 9001: 2015 certification, SEES certified standard will comply with any building or elevator code.



**Horizontal Surface Mount with Digital PI** 

### **Vertical Surface Mount**



**Vertical Flush Mount** 

### SEES-FCLS-FM-002





SEES-FCLS-FM-003



# >> In-stock Hall Stations


Economically priced and ready to ship!

### **LOW PROFILE SURFACE MOUNT**

SEES-FHOP-SMT-001TB SEES-FHOP-SMI-001TB SEES-FHOP-SMI-001TR

Terminal Hall Station (12-1/4" x 4" x 7/8"), Blue LED, Vandal Resistant Button SEES-FHOP-SMT-001TR Terminal Hall Station (12-1/4" x 4" x 7/8"), Red LED Vandal Resistant Button SEES-FHOP-SMT-001TW Terminal Hall Station (12-1/4" x 4" x 7/8"), White LED, Vandal Resistant Button Intermediate Hall Station (12-1/4" x 4" x 7/8"), Blue LED, Vandal Resistant Buttons Intermediate Hall Station (12-1/4" x 4" x 7/8"), Red LED, Vandal Resistant Buttons SEES-FHOP-SMI-001TW Intermediate Hall Station (12-1/4" x 4" x 7/8"), White LED, Vandal Resistant Buttons

SEES-FHOP-SMT-001TR



SEES-FHOP-SMT-001TR




SEES-FHOP-SMT-001TW

SEES-FHOP-SMT-001TB SEES-FHOP-SMT-001TW

**SEES-FHOP-SMT-**001TB

SEES-FHOP-SMI-001TR



954.971.1115 / fax 954.917.7337

SEES-FHOP-SMI-001TB

SEES-FHOP-SMI-001TW



# >>> SEES Modernization Equipment. Fast and Economical.

SEES offers the products you need for a timely Elevator Modernization. We have hydraulic power units available within a week, along with same day availability of Smartrise Controllers and multiple types of door operators. SEES also stocks many different sizes of doors for same day shipping. Whatever your Elevator Modernization needs are, SEES can provide the fastest solutions possible.



# **FEATURES**

- >> Imperial Motor
- 50HL/80 starts per hour; up to two motors per tank
- >> SEIM Pump
- >> Maxton or EECO Valve
- Muffler standard for removing pulsation & noise
- Oil level detection via dip stick or sight gauge
- Isolation between pump, motor assembly and tank
- Grooved or threaded fittings available



# **OPTIONAL FEATURES**

Low Pressure Switch • Oil Level Sight Gauge Viscosity Temperature Switch • Air Bladder Muffler Full Down Compensation • Oil Cooler • Thermostat Tank Heater • Pressure Gauge • Load Weighing Switch

# COLOR OPTIONS & YOUR COMPANY LOGO AVAILABLE



The SEES submersible power unit has been designed to fit through machine room doorways as small as 25" wide.



Acoustiblok soundproofing option keeps your submersible tank operating on the **Q**T



Today's Date:	
Quote Due Date:	



# Quiet Tank Quote Request Form

Customer:	Job Name:				
Contact:	Location:				
Phone: Cell:	Required Ship Date:				
Fax:	— Shipping Address:				
E-mail:					
Car Type:	Project Data:				
Single Jack (Direct)  Twin Jack Roped  Twin Jack (Direct)  Telescopic	Down Speed Regulated: Y N N Dampener				
Single Jack (Roped) In Ground	Valve: Maxton EECO				
Tank Type:	Voltage: 3 Phase 200-208 3 Phase 220-240 3 Phase 440-480 3 Phase 575-600				
Dry Submersible	Horsepower:				
Sty dumicisible	Speed Up: feet per minute				
Available Options:	Speed Down: feet per minute				
	Capacity: lbs. Relief psi				
Pressure Gauge Oil Cooler	Car Weight: lbs. No Load psi				
Valve Drain Load Weighing	Gross Load: lbs. Full Load psi				
Low Oil Level Switch Vent Opening	(Capacity + Car Weight)				
Oil Level Sight Gauge Tank Heater	Travel: feet  Piston DIA: inches				
Under Tank Isolation Oil Return Pump	Hertz: 50 60 120				
Low Pressure Switch	Starts per hour: 80 120				
Oil Viscosity Switch	Pipe Size:         2         2.5         3				
Conduit Box with Terminal Block	Tank Outlet: Grooved Threaded				
Enclosure Panels (Dry PU Only)	Tank Hand: Right Left  Coil Voltage: 115 VAC 230 VAC 115 VDC				
Vent Filler Breather / Protected					
	Contact SEES with confidence:				
Overflow Connection Provisions	800-526-0026				
Acoust blok. Sound Absorber	www.seesinc.com Fax to 954-917-7337				

Email for quote: info@seesinc.com



# HYDRAULIC CONTROLLER

ELEVATOR CONTROL SYSTEM

One of the only hydraulic controllers on the market with velocity and distance feedback along serial communications. Reduces valve adjustment time by showing the car's performance on the LCD display.

APPLICATION	Supports overhead, basement, and machine room-less
FEEDBACK	Distance and velocity
DISPATCH	Up to 8 car group
MAX. OPENINGS	10
MAX. SPEED	200FPM
DIMENSIONS	34"H x 24"W x 10"D
CABINET	NEMA 1. 4, 4x, and 7

# **Optional Accessories**

- Local and Remote Monitoring
- SmartConnect Pre-wired Inspection Box
- Isolation Transformer
- Load-Weighing Device

- Emergency Rescue Device
- Voice Annunciator Interface
- Card Reader Access
- Traveler and Hoistway Cables
- · OSHPD Certified
- Air Conditioning Unit





f SEES Inc @ SEESPARTS Always Smooth Sailing





# **SMARTRISE**

# >> SMARTRISE

Smartrise developed an innovative elevator controller system that gave customers an openmarket choice in the elevator industry. Using their universal printed circuit boards in every single controller they ship, Smartrise provides a consistent, easy to install product no matter the project, from hydro to traction, geared or gearless.





### **SEES Universal Roller Guide**

### >> Roller Guides

S.E.E.S. #	O.E.M. #	Description
URG-001	ED02000	3-1/4" Universal 3 wheel roller guide Model D
URG-002	EB02100	6" Universal 3 wheel roller guide Model B

# >> Replacement Rollers

S.E.E.S. #	O.E.M. #	Description
MIS-143S	EC18405	3-1/4" diameter, .4724 bore wheel
MIS-142	EA18359	6" diameter, .7874 bore wheel





5-143S MIS-

# ROLLER GUIDES

OPTIMUM RIDE QUALITY



URG-001



**URG-002** 

# **Hanger & Track Assemblies**

S.E.E.S. #	O.E.M. #	Description
GDO-HDT-001	HH1-0017N	Hanger Track, Hatch Door 40-42 Single Speed 82" Lg with hardware
GDO-HDT-001A	HH19-0026N	Hanger Track, Hatch Door 40-42 Single Speed 82" Lg Zinc Plate
GDO-HDT-002	HH1-0016N	Hanger Track, Hatch Door 37-39 Single Speed 76" Lg with hardware
GDO-HDT-003	HHN-0018N	Hanger Track, Hatch Door 43-45 Single Speed 88" Lg with hardware
GDO-HDT-004	HH1-0015N	Hanger Track, Hatch Door 34-36 Single Speed 70" Lg with hardware



GDO-HDT-003



GDO-HDT-001

S.E.E.S. #	O.E.M. #	Description
GDO-11	HH1-0022R	Door Hanger Assembly, sheave assembly complete R.H. 4-1/8" CL with 3/8-16 Bolts
GD0-11-P		Door Hanger Assembly, Type A, R.H. with poly roller
GD0-11A	HH1-0022L	Door Hanger Assembly, sheave assembly complete L.H. 4-1/8" CL with 3/8-16 Bolts
GDO-11A-P		Door Hanger Assembly, Type A, L.H. with poly roller
GD0-11B	HH3-0034R	Door Hanger Assembly, Sheave assembly complete, R.H. with Top Safety Retainers
GDO-11C	HH3-0034L	Door Hanger Assembly, Sheave assembly complete, L.H. with Top Safety Retainers











1B GDO-11C



# >> GAL Door Operators



GDO-MOVFR-002R

S.E.E.S. #	O.E.M. #	Description
GDO-MOVFR-002L	0P99-0002L	Door Operator, L.H., MOVFR, Single Speed-2 Speed 25"-29", 208 VAC, 13" Hdr
GDO-MOVFR-002R	OP99-0002R	Door Operator, R.H., MOVFR, Single Speed-2 Speed 25"-29", 208 VAC, 13" Hdr
GDO-MOVFR-003L	OP99-0003L	Door Operator, L.H., MOVFR, Single Speed-2 Speed 30"-34", 208 VAC, 13" Hdr
GDO-MOVFR-003R	OP99-0003R	Door Operator, R.H., MOVFR, Single Speed-2 Speed 30"-34", 208 VAC, 13" Hdr
GDO-MOVFR-004L	OP99-0004L	Door Operator, L.H., MOVFR, Single Speed-2 Speed 35"-39", 208 VAC, 13" Hdr
GDO-MOVFR-004R	OP99-0004R	Door Operator, R.H., MOVFR, Single Speed-2 Speed 35"-39", 208 VAC, 13" Hdr
GDO-MOVFR-005L	OP99-0005L	Door Operator, L.H., MOVFR, Single Speed-2 Speed 40-44", 208 VAC, 13" Hdr
GDO-MOVFR-005R	OP99-0005R	Door Operator, R.H., MOVFR, Single Speed-2 Speed 40-44", 208 VAC, 13" Hdr
GDO-MOVFR-006L	OP99-0006L	Door Operator, L.H., MOVFR, Single Speed-2 Speed 45"-48", 208 VAC, 13" Hdr
GDO-MOVFR-006R	OP99-0006R	Door Operator, R.H., MOVFR, Single Speed-2 Speed 45"-48", 208 VAC, 13" Hdr
GDO-MOVFR-006L-A	OP99-0006L	Door Operator, L.H., MOVFR, SS-2Spd 45-48", 115 VAC, Drive V
S.E.E.S. #	O.E.M. #	Description
GDO-MOVFR-200	OP101-0028N	Door Operator, MOVFR II 2SCP Special, with Door Drive Arm
GPC-201	MOVFR-0072N	Drive, 115 VAC for MOVFR II Oper Includes Drive Ribbon Cable



S.E.E.S. #	O.E.M. #	Description
GDO-MOVFR-101	OP100-0003N	Door Operator, CP, MOVFR, Single Speed-2 Speed, 30"-33" D.O., 208 VAC, 15" Hdr
GDO-MOVFR-102	OP100-0003N	Door Operator, CP, MOVFR, Single Speed-2 Speed, 34"-39" D.O., 208 VAC, 15" Hdr
GDO-MOVFR-103	OP100-0003N	Door Operator, CP, MOVFR, Single Speed-2 Speed, 40"-49" D.O., 208 VAC, 15" Hdr
GDO-MOVFR-104	OP100-0003N	Door Operator, CP, MOVFR, Single Speed-2 Speed, 50"-54" D.O., 208 VAC, 15" Hdr
GDO-MOVFR-105	OP100-0003N	Door Operator, CP, MOVFR, Single Speed-2 Speed, 55"-59" D.O., 208 VAC, 15" Hdr



# >> Doors

# **Cab Door Features**

- · Doors are available in single-speed side slide, center-opening, two-speed side slide configurations
- · Various door widths and heights are available to accommodate your project's needs
- Doors finish is stainless steel brushed (#4 finish) on 20 gauge material
- · Doors are rated for 90 minutes fire resistance and UL Labeled accordingly









SEES-CAB-36-84-SS-R

SEES-CAB-42-84-CP

SEES-CAB-36-84-2SP-R

# **Cab/Cab Doors**

S.E.E.S. #	Hand	Speed	Opening	Height	Hanger Mounting Hole Dimensions	Material/Finish
SEES-CAB-48-84-2S-L-S	Left	Double	24"	84"	4.125" Slow Door Only	Stainless Veneer
SEES-CAB-34-84-SS-R	Right	Single	34"	84"	4.125"	Stainless Veneer
SEES-CAB-36-84-SS-R	Right	Single	36"	84"	4.125"	Stainless Veneer
SEES-CAB-36-84-SS-L	Left	Single	36"	84"	4.125"	Stainless Veneer
SEES-CAB-36-84-2SP-R	Right	Two	36"	84"	4.125"	Stainless Veneer
SEES-CAB-36-84-2SP-L	Left	Two	36"	84"	4.125"	Stainless Veneer
SEES-CAB-36-84-CP-5WL	Left	Single	36"	84"	4.125"	5WL Stainless Steel
SEES-CAB-36-84-SS-L-M	Left	Single	36"	84"	4.125"	Muntz Veneer
SEES-CAB-36-84-SS-L-OTI-INTGRL	Left	Single	36"	84"	4.125" w/ Otis Integral Hangers	Stainless Veneer
SEES-CAB-36-84-SS-R-OTI-INTGRL	Right	Single	36"	84"	4.125" w/ Otis Integral Hangers	Stainless Veneer
SEES-CAB-36-84-SS-L-OTIS	Left	Single	36"	84"	4.125"	Stainless Veneer
SEES-CAB-36-84-SS-L-SPECIAL	Left	Single	36"	84"	4.125"	Stainless Veneer
SEES-CAB-36-84-SS-R-SPECIAL	Right	Single	36"	84"	4.125"	Stainless Veneer
SEES-CAB-36-84-SS-R-WIN	Right	Single	36"	84"	4.125" w/ Window - SPECIAL	Stainless Veneer
SEES-CAB-40-84-2SP-L-BB	Left	Two	40"	84"	4.125"	#4 Brushed Brass
SEES-CAB-40-84-CP	Center	Single	40"	84"	4.125"	Stainless Veneer
SEES-CAB-42-84-CP-5WL	Right	Single	40"	84"	4.125" w/ Window - SPECIAL	Stainless Veneer
SEES-CAB-42-84-CP	Center	Single	42"	84"	4.125"	Stainless Veneer
SEES-CAB-42-84-SS-R	Right	Single	42"	84"	4.125"	Stainless Veneer
SEES-CAB-42-84-SS-L	Left	Single	42"	84"	4.125"	Stainless Veneer
SEES-CAB-42-88.75-SS-L	Left	Single	42"	88.75"		Stainless Veneer
SEES-CAB-42-84-2SP-L	Left	Two	42"	84"	4.125"	Stainless Veneer
SEES-CAB-43.5-84.25-SS-R	Right	Single	42"	84.25"	Not Drilled	Stainless
SEES-CAB-43.5-84.25-SS-L	Right	Single	42"	84.25"	Not Drilled	Stainless
SEES-CAB-44-84-2SP-L	Left	Two	44"	84"	4.125"	Stainless Veneer
SEES-CAB-42-84-2SP-R	Right	Two	42"	84"	4.125"	Stainless Veneer
SEES-CAB-42-84-2SP-L	Left	Two	42"	84"	4.125"	Stainless Veneer
SEES-CAB-46-84-2SP-L	Left	Two	42"	84"	4.125"	Stainless Veneer
SEES-CAB-46-84-2SP-R	Right	Two	42"	84"	4.125"	Stainless Veneer



# **Cab / Cab Doors**







SEES-CAB-54-84-2S-CP



SEES-CAB-54-84-2S-RH

S.E.E.S. #	Hand	Speed	Opening	Height	Hanger Mounting Hole Dimensions	Material/Finish
SEES-CAB-42-84-CP-6940	Center	Single	42"	84"	4.125" GAL Hangers and Otis 6940 Locks	Stainless Veneer
SEES-CAB-42-84-CP-CA-M	Center	Single	42"	84"	4.125"	Stainless Veneer
SEES-CAB-42-84-CP-M	Center	Single	42"	84"	4.125"	Stainless Veneer
SEES-CAB-42-84-CP-MAC	Center	Single	42"	84"	4.125"	Stainless Veneer
SEES-CAB-42-84-CP-OTIS-6940	Center	Single	42"	84"	4.125"	Stainless Veneer
SEES-CAB-42-84-SS-L-OTIS	Left	Single	42"	84"	4.125"	Stainless Veneer
SEES-CAB-42-89.5-SS-R	Right	Single	42"	84"	4.125"	Stainless Veneer
SEES-CAB-43.5-83.25-SS-L-BLANK	Left	Single	43.5"	83.25"	Not Drilled	Stainless
SEES-CAB-44-84-SS-CP	Center	Single	44"	84"	4.125"	Stainless Veneer
SEES-CAB-44-84-SS-CP-A	Center	Single	44"	84"	4.125" Top Hole Only	Stainless Veneer
SEES-CAB-46-84-2S-CP	Center	Double	46"	84"	4.125"	Stainless Veneer
SEES-CAB-48-84-CP-SCH	Left		48"	84"	Drilled for Schindler	Stainless Veneer
SEES-CAB-48-84-2S-L	Left	Two	48"	84"	4.125"	Stainless Veneer
SEES-CAB-48-103-SS-CP-M	Center	Single	48"	103"	4.125"	Mirrored Stainless Steel
SEES-CAB-48-84-2S-R	Right	Two	48"	84"	4.125"	Stainless Veneer
SEES-CAB-48-84-2S-R-SPO-BLANK	Right	Two	48"	84"	Not Drilled, with Spec.	Dims
SEES-CAB-48-84-2S-L-BLANK	Left	Two	48"	84"	No Holes	Steinless Veneer
SEES-CAB-48-84-2S-CP	Center	Two	48"	84"	4.125"	Stainless Veneer
SEES-CAB-48-84-2S-R-6940	Right	Double	48"	84"	4.125" GAL Hangers and 6940 Lock	Stainless Veneer
SEES-CAB-48-84-2S-R-OTIS-6940	Right	Double	48"	84"	4.125" with Otis 6940 Lock	Stainless Veneer
SEES-CAB-48-84-SS-CP	Center	Single	48"	84"	4.125"	Stainless Veneer
SEES-CAB-48-96-2S-L	Left	Double	48"	96"	4.125"	Stainless Veneer
SEES-CAB-52-84-2S-LH	Left	Double	52"	84"	4.125"	Stainless Veneer
SEES-CAB-52-84-2S-RH	Right	Double	52"	84"	4.125"	Stainless Veneer
SEES-CAB-54-84-2S-CP	Center	Double	54"	84"	4.125"	Stainless Veneer
SEES-CAB-54-84-2S-LH	Left	Double	54"	84"	4.125"	Stainless Veneer
SEES-CAB-54-84-2S-RH	Right	Double	54"	84"	4.125"	Stainless Veneer
SEES-CAB-54-90-SS-CP	Center	Single	54"	90"	4.125"	Stainless Veneer
SEES-CAB-54-84-2S-RH	Right	Two	54"	84"	4.125"	Stainless Veneer
SEES-CAB-54-84-2S-CP	Center	Two	54"	84"	4.125"	Stainless Veneer
SEES-CAB-54-84-2S-LH	Left	Two	54"	84"	4.125"	Stainless Veneer
SEES-CAB-CP-SPECIAL	Center	Per Spec				



# **Door Features**

- · Doors are available in single-speed side slide, center-opening, two-speed side slide configurations
- · Various door widths and heights are available to accommodate your project's needs
- Doors finish is stainless steel brushed (#4 finish) on 20 gauge material
- · Doors are rated for 90 minutes fire resistance and UL Labeled accordingly

# **Hall / Entrance**

S.E.E.S. #	Hand	Speed	Opening	Height	Hanger Mounting Hole Dimensions	Material/Finish
SEES-ENT-36-84-SS-R-OTI-INTGRL	Right	Single	36"	84"	4.125", w/ Otis Integral Hangers	Stainless Veneer
SEES-ENT-36-84-SS-L-OTI-INTGRL	Left	Single	36"	84"	4.125", w/ Otis Integral Hangers	Stainless Veneer
SEES-ENT-36-84-SS-L	Left	Single	36"	84"	4.125"	Stainless Veneer
SEES-ENT-36-84-SS-R	Right	Single	36"	84"	4.125"	Stainless Veneer
SEES-ENT-36-84-SS-L-CA	Left	Single	36"	84"	4.125" H w/o Escutcheon Holes	Stainless Veneer
SEES-ENT-36-84-SS-R-CA	Right	Single	36"	84"	4.125" H w/o Escutcheon Holes	Stainless Veneer
SEES-ENT-36-84-2SP-L	Left	Two	36"	84"	4.125"	Stainless Veneer
SEES-ENT-36-84-2SP-R	Right	Two	36"	84"	4.125"	Stainless Veneer
SEES-HALL-40-84-2SP-L-BB	Left	Two	40"	84"	4.125"	#4 Brushed Brass
SEES-ENT-40.25-84-2SP-R	Right	Two	40.25"	84"	4.125"	Stainless Veneer
SEES-ENT-42-84-SS-L	Left	Single	42"	84"	4.125"	Stainless Veneer
SEES-ENT-42-84-SS-L-DVR	Left	Single	42"	84"	4.125"	#4 Stainless Steel
SEES-ENT-42-84-SS-R	Right	Single	42"	84"	4.125"	Stainless Veneer
SEES-ENT-42-84-SS-R-BLANK	Right	Single	42"	84"	No holes	Stainless Veneer
SEES-ENT-42-84-CP	Center	Single	42"	84"	4.125"	Stainless Veneer
SEES-ENT-42-84-2SP-L	Left	Two	42"	84"	4.125"	Stainless Veneer
SEES-ENT-42-84-2SP-L-BLANK	Left	Two	42"	84"	No Holes	Stainless Veneer
SEES-ENT-42-84-2SP-R	Right	Two	42"	84"	4.125"	Stainless Veneer
SEES-ENT-42-107-CP	Center	Single	42"	107"	4.125", GAL, Left oriented	Stainless Veneer
SEES-ENT-42-84-CP-CA	Center	Single	42"	84"	4.125" H w/o Escutcheon Holes	Stainless Veneer
SEES-ENT-46-84-2SP-L	Left	Two	46"	84"	4.125"	Stainless Veneer
SEES-ENT-46-84-2SP-R	Right	Two	46"	84"	4.125"	Stainless Veneer
SEES-ENT-48-84-2SP-L	Left	Two	48"	84"	4.125"	Stainless Veneer
SEES-ENT-48-84-2SP-L-CA	Left	Single	48"	84"	4.125" H w/o Escutcheon Holes	Stainless Veneer
SEES-ENT-48-84-2SP-RH-MAY0-0T	1 Right	Two	48"	84"	Drilled for Otis	Stainless Steel
SEES-ENT-48-84-2SP-R-CA	Right	Single	48"	84"	4.125" H w/o Escutcheon Holes	Stainless Veneer
SEES-ENT-48-84-SS-CP-DVR-INTGF	R Center	Single	48"	84"	Dover Intgrl Hangers	Stainless Veneer
SEES-ENT-OTIS-84-SS-RH	Right	Single	46-3/8"	84-1/2"	4.125"	Stainless Veneer
SEES-ENT-54-84-2S-RH	Right	Two	54"	84"	4.125"	Stainless Veneer
SEES-ENT-54-84-2S-CP	Center	Two	54"	84"	4.125"	Stainless Veneer
SEES-ENT-54-84-2S-LH	Left	Two	54"	84"	4.125"	Stainless Veneer
SEES-JAMB-48-96-2SP-RH	Right	Two	48"	96"	No Holes	Stainless Veneer

# **Doors For California Only**

S.E.E.S. #	Hand	Speed	Opening	Height	Hanger Mounting Hole Dimensions	Material/Finish
SEES-ENT-42-84-2SP-R-CA	Right	Two	42"	84"	W/o Escutcheon Holes	Stainless Veneer
SEES-ENT-42-84-SS-R-CA	Right	Single	42"	84"	W/o Escutcheon Holes	Stainless Veneer
SEES-ENT-42-84-SS-L-CA	Left	Single	42"	84"	W/o Escutcheon Holes	Stainless Veneer
SEES-ENT-43.5-83.25-SS-L-CA-BL	Left	Single	43.5"	83.25"	Not Drilled, w/o Escutcheon Hole	s Stainless Steel
SEES-ENT-43.5-83.25-SS-R-CA-BL	Right	Single	43.5"	83.25"	Not Drilled, w/o Escutcheon Hole	s Stainless Steel
SEES-ENT-48-84-2SP-L-CA-BLANK	Left	Two	48"	84"	No Holes, w/o Escutcheon Holes	Stainless Veneer




# **Sight Guards**

S.E.E.S. #	Description
SEES-ENT-52-84-2S-RH	Sight Guards, for SEES-ENT-48-84-2SP-L
SEES-ENT-SG-84-001	Sight Guards, for SEES-ENT-SG-84-001
SEES-ENT-SG-84-001	Sight Guards, Special Size


# **Hall / Entrance**

S.E.E.S. #	Hand	Speed	Opening	Height	Hanger Mounting Hole Dimensions	Material/Finish
SEES-ENT-36-84-2SP-L-BLACK	Left	Double	36"	84"	4.125"	Painted black
SEES-ENT-36-84-2SP-R-BLACK	Right	Double	36"	84"	4.125"	Painted black
SEES-ENT-36-84-CP	Center	Single	36"	84"	4.125"	Stainless Veneer
SEES-ENT-36-84-SS-L-THY	Left	Single	36"	84"	4.125"	Stainless Veneer
SEES-ENT-36-84-SS-L-TKE	Left	Single	36"	84"	4.125" Drilled for TKE	Stainless Veneer
SEES-ENT-36-84-SS-L-WHITE	Left	Single	36"	84"	4.125"	Painted White
SEES-ENT-42-84-CP-6940	Center	Single	42"	84"	4.125" GAL Hangers and Otis 6940 Locks	Stainless Veneer
SEES-ENT-42-84-CP-CA-M	Center	Single	42"	84"	4.125" w/o Escutcheon Hole	Stainless Veneer
SEES-ENT-42-84-SS-L-316	Left	Single	42"	84"	4.125" Galv. Core	#4 Brushed Brass
SEES-ENT-42-84-CP-OTIS-6940	Center	Single	42"	84"	4.125" Otis 6940 Locks and Hangers	Stainless Veneer
SEES-ENT-42-84-SS-L-P4P	Left	Single	42"	84"	4.125"	Primed for Paint
SEES-ENT-42-84-SS-L-THY	Left	Single	42"	84"	4.125" Drilled for TKE	Primed for Paint
SEES-ENT-42-84-SS-L-TKE	Left	Single	42"	84"	4.125" Drilled for TKE	Stainless Veneer
SEES-ENT-42-84-CP-CA-M	Left	Single	42"	84"	4.125" Drilled for TKE	Stainless Veneer
SEES-ENT-42-84-SS-R-316	Right	Single	42"	84"	4.125"	Stainless Veneer
SEES-ENT-42-84-SS-R-P4P	Right	Single	42"	84"	4.125"	<b>Primed for Paint</b>
SEES-ENT-46-84-2S-CP-P4P	Center	Double	46"	84"	4.125"	Primed for Paint
SEES-ENT-46-84-2S-L-P4P	Left	Double	46"	84"	4.125"	Primed for Paint
SEES-ENT-46-84-2S-R-P4P	Right	Double	46"	84"	4.125"	Primed for Paint
SEES-ENT-48-84-2S-CP	Center	Double	48"	84"	4.125"	Stainless Veneer
SEES-ENT-48-84-2S-CP-CA	Center	Double	48"	84"	4.125" w/o Escutcheon Holes	Stainless Veneer
SEES-ENT-48-84-2SP-L-PACKAGE	Left	Double	48"	84"	4.125" Per Specs and Drawing	Stainless Veneer
SEES-ENT-48-84-2SP-L-THY	Left	Double	48"	84"	4.125" Thyssen Drilling	Stainless Veneer
SEES-ENT-48-84-2SP-R-THY	Right	Double	48"	84"	4.125" Thyssen Drilling	Stainless Veneer
SEES-ENT-48-84-2S-R	Right	Double	48"	84"	4.125"	Stainless Veneer
SEES-ENT-48-84-2S-R-6940	Right	Double	48"	84"	4.125" GAL Hangers and Otis 6940 Locks	Stainless Veneer
SEES-ENT-48-84-2S-R-OTIS-6940	Right	Double	48"	84"	4.125" Otis 6940 Lock	Stainless Veneer
SEES-ENT-48-96-2S-L	Left	Double	48"	96"	4.125"	Stainless Veneer
SEES-ENT-52-84-2S-LH	Left	Double	52"	84"	4.125"	Stainless Veneer
SEES-ENT-52-84-2S-RH	Right	Double	52"	84"	4.125"	Stainless Veneer

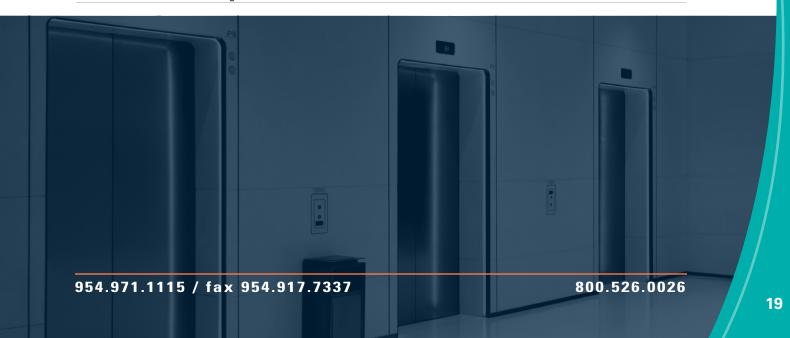



# **CAN HANDLE OVER 18,000 Ib OF FORCE!**

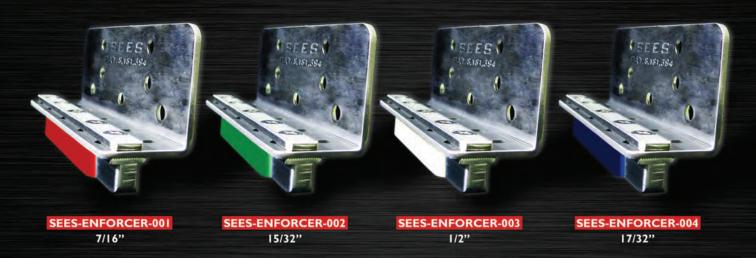

IDEAL FOR: AIRPORTS, HOSPITALS, CONDOS, COLLEGES & UNIVERSITIES, HOTELS, TRANSIT AUTHORITIES, PRISONS & JAILS, STORAGE FACILITIES, APARTMENTS AND ANY PUBLIC HOUSING.

SAFETY: Limits liability due to door failure | DURABILITY: Less call backs, reduce door damage | SAVINGS: Reduce service calls with fewer gib replacement/door alignment.









# ENFORCER: KNOV SAFETY

PATENT # SEES 8,181,394

# Enforcer

Part Number Gib width
SEES-ENFORCER-EDGE-R 7/16"
SEES-ENFORCER-EDGE-G 15/32"
SEES-ENFORCER-EDGE-W 1/2"
SEES-ENFORCER-EDGE-B 17/32"

### Heplaces all of these gib kits

























NO OFFSET? NO PROBLEM: SEES Enforcer Edge is perfect for Westinghouse elevators with offsets between 0 and 5/16ths.









Always Smooth Sailing



2781 West McNab Rd., Pompano Beach, FL 33069 • 800-526-0026 • www.SEESinc.com

SOUTHERN ELEVATOR