

## PIT - CAR TOP - RAILS

## QUICK LOCATOR GUIDE

<b>Alarms</b> .....	435
<b>Buffer Springs</b> .....	431
<b>Car Top Inspection Station</b> .....	438-439
<b>Chimes</b> .....	434
<b>Door Latch Assemblies</b> .....	437-438
<b>Earthquake Detection</b> .....	440
<b>Exhaust Fan Assemblies</b> .....	436
<b>Fans</b> .....	436
<b>Fire Alarms</b> .....	435
<b>Gongs</b> .....	435
<b>Guide Rails</b> .....	430
<b>Pit Flood Alarm System</b> .....	428
<b>Pit Ladders</b> .....	428
<b>Pit Sump Pumps</b> .....	429
<b>Pit Switches</b> .....	429
<b>Platform Guards</b> .....	438
<b>Safety Ripcord System</b> .....	432
<b>SEES H2O Alarm</b> .....	427-428
<b>SEES Selector</b> .....	441
<b>Seismic Sensor</b> .....	440
<b>Toe Guards</b> .....	440
<b>Top of Car Handrail System</b> .....	432
<b>Top of Car Handrail Safety Rails</b> .....	433
<b>Universal Power Supply for Emergency Lighting</b> .....	440
<b>Wire Rope Hardware</b> .....	431



# FEATURES

- » Imperial Motor
- » 50HL/80 starts per hour; up to two motors per tank
- » SEIM Pump
- » Maxton or EECO Valve
- » Muffler standard for removing pulsation & noise
- » Oil level detection via dip stick or sight gauge
- » Isolation between pump, motor assembly and tank
- » Grooved or threaded fittings available

### Remarkably Clean:

With SEES manufacturing's unique design, your machine room will remain free of oil spills as all components are inside the tank (including the optional shut-off valve).



# OPTIONAL FEATURES

- VISCOSITY TEMPERATURE SWITCH
- PRESSURE GAUGE • LOW PRESSURE SWITCH
- TANK HEATER • FULL DOWN COMPENSATION
- AIR BLADDER MUFFLER • LOAD WEIGHING SWITCH
- OIL LEVEL SIGHT GAUGE • OIL COOLER • THERMOSTAT

## COLOR OPTIONS & YOUR COMPANY LOGO AVAILABLE



The SEES submersible power unit has been designed to fit through machine room doorways as small as 25" wide.



Acoustiblok soundproofing option keeps your submersible tank operating on the **QT**



# Always Smooth Sailing





# DAMAGE CONTROL

## NEW & IMPROVED PIT FLOOD ALARM

☞ PART# SEES-H<sub>2</sub>O-ALARM-001 {110 VAC 4" ALARM BELL WITH "SINGLE BARREL" FLOAT SWITCH GUARD}

☞ PART# SEES-H<sub>2</sub>O-ALARM-002 {110 VAC 4" ALARM BELL WITH AUXILIARY OUTPUT CONTACT & "DOUBLE BARREL" FLOAT SWITCH GUARDS}

THE SEES H<sub>2</sub>O ALARM FEATURES STEEL FLOAT SWITCH GUARDS TO PREVENT DAMAGE DURING INSTALLATION OR SERVICE.

"DOUBLE BARREL"  
FLOAT SWITCH GUARDS



## DETECT • PROTECT

- DETECT FLOODS BEFORE THEY CAUSE EXPENSIVE WATER DAMAGE.
- PROVIDES A RELIABLE EARLY WARNING SYSTEM.
- PROTECT VALUABLE EQUIPMENT FROM ALL WATER HAZARDS.

*Your Elevator "Life Raft"*

*Always Smooth Sailing*





SEES-H2O-ALARM-001  
SEES-H2O-ALARM-002



S.E.E.S. #	Description
SEES-H2O-ALARM-001	SEES Pit Flood Alarm System, 110 VAC with Bell (Single Float)
SEES-H2O-ALARM-002	SEES Pit Flood Alarm System, 110 VAC with Bell & Output (Dual Floats)
SEES-H2O-ALARM-002L	SEES Pit Flood Alarm System, 110FT Long 110 VAC w/ Bell & Output
SEES-H2O-ALARM-003	Float Switch, Replacement Float Switch for H2O Alarm
SEES-H2O-ALARM-004	SEES Pit Flood Alarm System, 110 VAC with Autodialer & Output
SEES-H2O-ALARM-006	SEES Pit Flood Switch, Nema4X Encloser Stainless Float Bell & Output

#### Features

Detect floods before they cause expensive water damage. Provides a reliable early warning system. Protects Valuable Equipment from all water hazards.



Double Barrel Switch Housing

SEES-H2O-ALARM-002



SEES-H2O-ALARM-002E

## Escalator Flood Alarm

S.E.E.S. #	Description
SEES-H2O-ALARM-002E	SEES Escalator Flood Alarm System, 110 VAC with Bell and Output



MIS-WET-DRY-VAC

## Dry-Vacs

S.E.E.S. #	Description
MIS-WET-DRY-VAC	Wet Dry Vac, 5 Gallon Bucket Head



SEES-PIT-LDR-001

## Pit Ladders

S.E.E.S. #	Description
SEES-PIT-LDR-001	Pit ladder, 16" x 9' Standard Mounting
SEES-PIT-LDR-001E	Ladder Extension, 2 extension for 16" Pit Ladder
SEES-PIT-LDR-002	SEES Pit Ladder, 12" x 9' Standard Mounting
SEES-PIT-LDR-002E	Extension, for 12" Pit Ladder 2' Extension
SEES-PIT-LDR-003	SEES Pit Ladder, 9" x 9', Standard Mounting



SEES-PIT-LDR-003



## Pit Switches

S.E.E.S. #	Description
MIS-908	<b>Pit Switch</b> , Run/Stop control switch, HP 125/250 VAC. Meets ANSI A17.1b Sec. 210.2E with OSHA Safety Lockout on switch guard. The best on the market!
MIS-909	<b>Pit Switch</b> , Labeled UL/CSA model for code requirements.
SEES-PIT-LT-001	<b>Pit Light Pack</b> , Light with Cage, GFCI Outlet, and Rocker Switch
SEES-PIT-LT-002	<b>Pit Light Pack</b> , Light/Cage, GFCI Outlet, Run/Stop Rocker Switch for Light
SEES-PIT-SW-001	<b>Pit Light Pack</b> , Push-to-Stop Pull-to-Run, Standard Encl, 1 N.O./1 N.C.
SEES-PIT-SW-001N	<b>Pit Switch</b> , Push-to-Stop Pull-to-Run, NEMA4X
SEES-PIT-SW-002	<b>Pit Switch</b> , Push-to-Stop Pull-to-Run, Standard Encl, 2 N.C.
SEES-PIT-SW-002N	<b>Pit Switch</b> , Push-to-Stop Pull-to-Run, NEMA4X, 2 N.C.



MIS-908



MIS-909



SEES-PIT-LT-002



SEES-PIT-SW-002

## Pit Sumps

S.E.E.S. #	Description
SEES-SUMP-001	<b>SEES Sump Pump</b> , 1/3HP Submersible with Float
SEES-SUMP-002	<b>SEES Sump Pump</b> , 1/2HP Submersible with Float
MIS-913*	<b>Sump Switch</b> , solid state switch, water/no oil, 120 VAC

\*Meets ASME A17.1, 2.2.2.5 requirements




SEES-SUMP-002



MIS-913

## Guide Rails

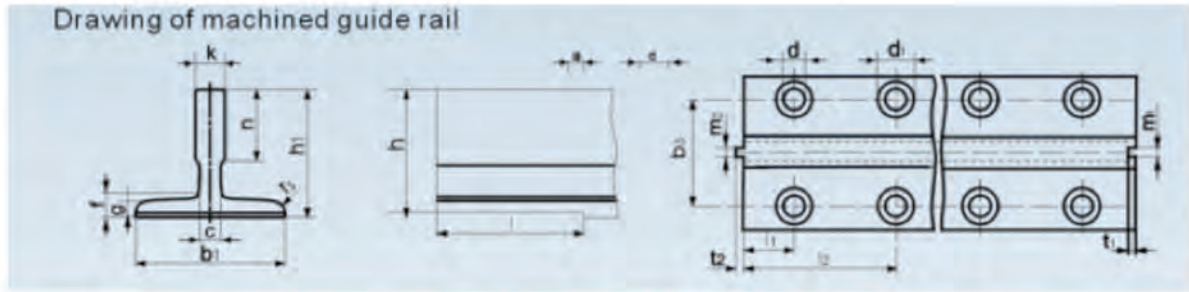

	b1	h1	h	k	n	c	g	f	rs	m1	m2	t1	t2	l	l1	l2	b3	d
T70-1/B	2.75	2.52	2.56	0.354	1.34	0.236	0.236	0.314	0.05	0.118	0.116	0.138	0.12	5.04	0.98	4.13	1.654	0.5118
T89/B	3.50	2.44	2.402	0.625	1.31	0.375	0.313	0.438	0.11	0.252	0.251	0.281	0.25	6.14	1.50	4.50	2.250	0.5625
T127-2/B	5.00	3.50	3.465	0.625	2.01	0.375	0.500	0.625	0.20	0.252	0.251	0.281	0.25	6.14	1.50	4.50	3.125	0.6875

Dimensions are inches

## Guide Rails

S.E.E.S. #	Description
<b>SEES-GR-T50-2.5M</b>	<b>Guide Rail</b> , 3.75 LB/FT Machined Guide Rail, 2.5M
<b>SEES-GR-T50-CLIP</b>	<b>Guide Rail Clip</b> , 3.75 LB/FT Machined Guide Rail Forged Clip, 5/8" I.D.
<b>SEES-GR-T50-FP</b>	<b>Fishplate</b> , 3.75 LB/FT Machined Guide Rail Fishplate
<b>SEES-GR-T89-8</b>	<b>Guide Rail</b> , 8.25 LB/FT Machined Guide Rail 8' Length
<b>SEES-GR-T89-10</b>	<b>Guide Rail</b> , 8.25 LB/FT Machined Guide Rail 10' Length
<b>SEES-GR-T89-16</b>	<b>Guide Rail</b> , 8.25 LB/FT Machined Guide Rail 16' Length
<b>SEES-GR-T89-CLIP</b>	<b>Guide Rail Clip</b> , 8.25 LB/FT Guide Rail Clips, 5/8" I.D.
<b>SEES-GR-T89-FP</b>	<b>Fishplate</b> , 8.25 LB/FT Guide Rail Fishplate
<b>SEES-GR-T89-FP-BN</b>	<b>Fishplate Hardware</b> , 8.25 LB/FT Guide Rail Fishplate Hardware, 8 Nuts & Bolts
<b>SEES-GR-T127-8</b>	<b>Guide Rail</b> , 15.125 LB/FT Machined Guide Rail 8' Length
<b>SEES-GR-T127-16</b>	<b>Guide Rail</b> , 15.125 LB/FT Machined Guide Rail 16' Length
<b>SEES-GR-T127-CLIP</b>	<b>Guide Rail Clip</b> , 15.125 LB/FT Guide Rail Clips, 5/8" I.D.
<b>SEES-GR-T127-FP</b>	<b>Fishplate</b> , 15.125 LB/FT Guide Rail Fishplate
<b>SEES-GR-T127-FP-BN</b>	<b>Fishplate Hardware</b> , 15.125 LB/FT Guide Rail Fishplate Hdw, 8 Nuts & Bolts
<b>SEES-GR-T127-FP-LP</b>	<b>Guide Rail Fishplate</b> , 15.125LB/FT, Low Profile
<b>SEES-GR-T127-FP-HD</b>	<b>Guide Rail Fishplate</b> , 15.125LB/FT, Heavy Duty XXH threaded
<b>SEES-GR-T70-8</b>	<b>Guide Rail</b> , 6 LB/FT Machined Guide Rail 8' Length
<b>SEES-GR-T70-FP</b>	<b>Fishplate</b> , 6 LB/FT Machined Guide rail Fishplate
<b>SEES-GRB-001</b>	<b>Guide Rail Bracket</b> , adjustable 2-7/16" to 6-7/16" for 12 & 15 LB
<b>SEES-GRB-001E</b>	<b>Guide Rail Extension Bracket</b> , for SEES-GRB-001
<b>SEES-GRB-002</b>	<b>Guide Rail Bracket</b> , adjustable 2-1/8" to 4-1/8" for 15 LB
<b>SEES-GRB-003</b>	<b>Guide Rail Bracket</b> , 1/4" x 3" 90deg Mntg Bracket, Slotted Holes
<b>SEES-GRC-001</b>	<b>Guide Rail Clip</b> , with nut and bolt, for 12 LB and 15 LB, 5/8" I.D.
<b>SEES-GRC-002</b>	<b>Guide Rail Clip</b> , with nut and bolt, for 8 LB, 5/8" I.D.



SEES-GRB-001



SEES-GRB-001E



SEES-GR-T127-CLIP



SEES-GRC-001



SEES-GRB-002



SEES-GRB-003

## Buffer Springs

S.E.E.S. #	Description
SEES-BS-8500	<b>Buffer Spring</b> , 18.50" x 4.75" O.D. x 2.75" I.D. 1" Steel Wire 14 Turns, 8,500 lb capacity
SEES-BS-10000	<b>Buffer Spring</b> , 18.50" x 4.75" O.D. x 2.75" I.D. 1" Steel 13.75 Turns, 10K lb capacity
SEES-BSS-8642	<b>Buffer Spring Stand</b> , for 8642 Spring
SEES-OBSW-001	<b>Oil Buffer Switch</b> , Universal 1 N.O./1 N.C.



SEES-BS-8500

## Pit Products

### Wire Rope Hardware

S.E.E.S. #	Description
MIS-WR-102	<b>Wedge Insert</b> , 1/2" for rope diameter 1/2"
MIS-WR-103	<b>Wedge Insert</b> , 5/8" for rope diameter 5/8"
MIS-WR-104	<b>Retainer Clamp</b> , 1/4" and 5/8" for rope diameter 1/4" and 3/8". 2 per assembly
MIS-WR-105	<b>Retainer Clamp</b> for rope diameter 1/2", 9/16" & 5/8" 2 per assembly
MIS-WR-106	<b>Wedge Guard</b> for 3/8" cable
MIS-WR-107	<b>Wedge Guard</b> for 1/2" and 5/8" cable
MIS-WR-108	<b>Seizing Bands</b> , 5/8", Box of 50 for 5/8" wire rope
MIS-WR-109	<b>Seizing Bands</b> , 1/2", Box of 50 for 1/2" wire rope
MIS-WR-110	<b>Seizing Bands</b> , 3/8", Box 50 for 3/8" wire rope



MIS-WR-103



MIS-WR-104



MIS-WR-106



MIS-WR-107



MIS-WR-108




MIS-WR-110

## Safety Ripcord System

S.E.E.S. #	Description
SEES-RIPCORDER-001	Safety Ripcord, Pit Kit
SEES-RIPCORDER-002	Safety Ripcord, TOC Kit

Contact SEES for more information on this life saving safety system.

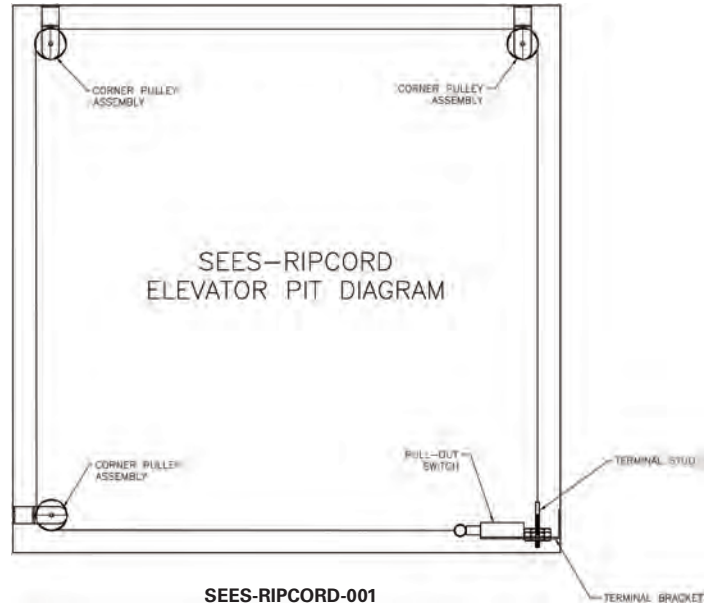

## Car Tops

The SEES-TOCH (Top of Car Handrail) system is a fully adjustable, light weight design that will fit existing and new cab installations. The SEES-TOCH is constructed of durable 6061 extruded aluminum square tubing 1/8" thick for superior performance and resistance to corrosion. Each kit comes with all necessary hardware and kick plate for ease of installation. It can be mounted to existing canopy or adapted with uni-strut (not provided.) The SEES-TOCH is designed to meet ASME Code A17.1A, 2.10.2 & 2.14.1.7. Each package can be shipped via UPS or FedEx. Custom sizes are available upon request.



## Top of Car Handrail

S.E.E.S. #	O.E.M. #	Description
SEES-TOCH-001	18-400	Front Opening 66"-96" W x 46"-70" D
SEES-TOCH-002	18-410	Front Opening 46"-70" W x 66"-110" D
SEES-TOCH-003	18-440	Front Opening 66"-96" W x 66"-96" D
SEES-TOCH-004	18-430	Front & Rear Opening Up to 96" W x 46"-70" D
SEES-TOCH-005	18-420	Front & Rear Opening Up to 72" W x 66"-110" D
SEES-DRKP-001		SEES Door Reinforcing Kickplate, 16GA 304SS



## Top of Car Safety Rails

TOC KITS / CONFORMS TO ASME 17.1 SPECIFICATIONS

### BIG-TOC and LIL-TOC Top Of Car safety rails

Part Number	Toe-board Part Number	Description	Opening	Size Range (min > max) Width (in • m)	Depth (in • m)	Weight lbs • kg
100-01	100-01TB	LIL-TOC	front	57 > 82 • 1.45 > 2.08	57 > 82 • 1.45 > 2.08	148 • 67.2
100-01 / 100-20		LIL-TOC w/ two-sided extension kit	front	57 > 82 • 1.45 > 2.08	99 > 123 • 2.51 > 3.12	183 • 83.2
100-01 / 100-19		LIL-TOC w/ three-sided extension kit	front	99 > 123 • 2.51 > 3.12	99 > 123 • 2.51 > 3.12	200 • 90.9
100-03	100-03TB	BIG-TOC 60	front	69 > 118 • 1.75 > 3.00	69 > 118 • 1.75 > 3.00	184 • 83.6
100-03 / 100-20		BIG-TOC 60 w/ two-sided extension kit	front	69 > 118 • 1.75 > 3.00	123 > 159 • 3.12 > 4.04	219 • 99.5
100-03 / 100-19		BIG-TOC 60 w/ three-sided extension kit	front	123 > 159 • 3.12 > 4.04	123 > 159 • 3.12 > 4.04	236 • 107.3
100-05	100-05TB	BIG-TOC 72	front	69 > 118 • 1.75 > 3.00	81 > 130 • 2.06 > 3.30	192 • 87.3
100-05 / 100-20		BIG-TOC 72 w/ two-sided extension kit	front	69 > 118 • 1.75 > 3.00	135 > 171 • 3.43 > 4.34	227 • 103.2
100-05 / 100-19		BIG-TOC 72 w/ three-sided extension kit	front	123 > 159 • 3.12 > 4.04	135 > 171 • 3.43 > 4.34	244 • 110.9
100-13	100-13TB	LIL-TOC	front	45 > 70 • 1.14 > 1.78	69 > 106 • 1.75 > 2.69	158 • 71.8
100-15	100-15TB	LIL-TOC	front	57 > 82 • 1.45 > 2.08	69 > 106 • 1.75 > 2.69	162 • 73.6
100-17	100-17TB	LIL-TOC	front	57 > 82 • 1.45 > 2.08	45 > 70 • 1.14 > 1.78	141 • 64.1
100-13 / 100-20		LIL-TOC w/ two-sided extension kit	front	45 > 70 • 1.14 > 1.78	123 > 147 • 3.12 > 3.73	193 • 87.7
100-15 / 100-20		LIL-TOC w/ two-sided extension kit	front	57 > 82 • 1.45 > 2.08	123 > 147 • 3.12 > 3.73	197 • 89.5
100-17 / 100-20		LIL-TOC w/ two-sided extension kit	front	57 > 82 • 1.45 > 2.08	99 > 111 • 2.51 > 2.89	176 • 80.0
100-13 / 100-19		LIL-TOC w/ three-sided extension kit	front	99 > 111 • 2.51 > 2.89	123 > 147 • 3.12 > 3.73	210 • 95.5
100-15 / 100-19		LIL-TOC w/ three-sided extension kit	front	99 > 123 • 2.51 > 3.12	123 > 147 • 3.12 > 3.73	214 • 97.3
100-17 / 100-19		LIL-TOC w/ three-sided extension kit	front	99 > 123 • 2.51 > 3.12	99 > 111 • 2.51 > 2.89	193 • 87.7
100-07	100-07TB	LIL-TOC F&R	front and rear	n/a	57 > 82 • 1.45 > 2.08	116 • 52.7
100-09	100-09TB	BIG-TOC 60 F&R	front and rear	n/a	69 > 118 • 1.75 > 3.00	142 • 64.5
100-11	100-11TB	BIG-TOC 72 F&R	front and rear	n/a	81 > 130 • 2.06 > 3.30	149 • 67.7
100-07 / 100-20		LIL-TOC F&R w/ two-sided extension kit	front and rear	n/a	99 > 123 • 2.51 > 3.12	151 • 68.6
100-09 / 100-20		BIG-TOC 60 F&R w/ two-sided extension kit	front and rear	n/a	123 > 159 • 3.12 > 4.04	177 • 80.5
100-11 / 100-20		BIG-TOC 72 F&R w/ two-sided extension kit	front and rear	n/a	135 > 171 • 3.43 > 4.34	184 • 83.6

BIG-TOC and LIL-TOC (Top Of Car) safety rail kits install on top of freight and passenger traction elevators to create a safer and more secure car-top environment for both people and their tools. These permanent guardrail kits are easy to install and quickly adjust to the required size. They are adaptable to both front-opening and front-and-rear opening car types. All rails, bolts, nuts and hardware are included. The major siderail components come pre-assembled. Installation generally takes under an hour. The toe board is ordered separately and serves as an added measure to prevent the loss of tools and other important items.

#### Determining width and depth requirements for your TOC safety rail kit:


**Width** – The distance between the roller guide plates determines width, because the TOC side rails mount inside the roller guide plates.

**Depth** – Measure the inside car depth.

**Height** – Height is adjustable and is measured from the top of the car to the top handrail of the installed TOC safety rail kit.

NOTE: If clearance between the top of the car and the bottom of the crosshead is less than 18", please call for assistance.

All listed toe boards are 4" height; 5" height available upon request.

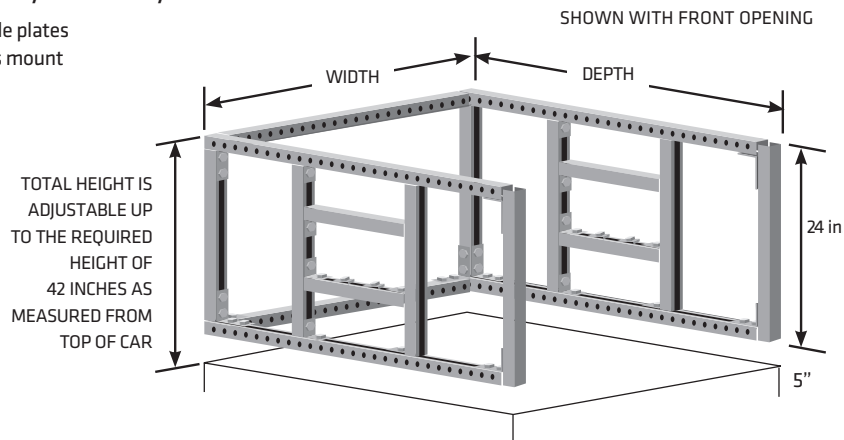

## Bells and Alarms

### Electronic Chimes



S.E.E.S. #	Description
MIS-CH1	<b>Chime</b> , universal replacement for most chimes, 24 - 130 VAC or VDC, non-polar negative common, 3-wire hook-up, chimes 1 up, 2 down, 4" x 2-1/2" x 1"
MIS-CH7	<b>Floor Passing Chime</b> , multi-volt 24 - 120V
MIS-CH9	<b>Chime</b> , Sonalert, 60/250V VAC or VDC SC250D
CYB-381	<b>Audio alert device</b> , 4-28 VDC
CYB-382-S	<b>Audio alert device</b> , 3-20 VDC
CYB-382-SB	<b>Bracket</b> , Mounting for Audio Alert Device
CYB-50	<b>Audio alert device</b> , 70-150 VDC



MIS-CH1



MIS-CH7



MIS-CH9



CYB-382-S



CYB-382-SB



CYB-50

## Bells and Alarms

### Fire Alarms

S.E.E.S. #	O.E.M. #	Description
MIS-250	9120B	<b>Smoke Alarm</b> , Wire-In Type Smoke Alarm, Dual Ionization, Power 120 VAC at 60Hz with 9V battery back-up
MIS-250A	RM4	<b>Relay</b> , Relay module, 120 VAC, for MIS-250



MIS-250



MIS-250A

### Alarm Bells

Easy to install, alarm bells have a strong, simplified mechanical construction which requires less maintenance time. Rugged construction with rust-protected finish provide reliable performance for both indoor and outdoor use.

S.E.E.S. #	Description
MIS-125D	<b>Alarm Bell</b> , 12 VDC, 6" diameter
MIS-125E	<b>Alarm Bell</b> , 120 VAC, 6" diameter
MIS-125F	<b>Alarm Bell</b> , "Flashing" type, 120 VAC, 6" diameter, with flashing red light
MIS-125M	<b>Alarm Bell</b> , 6" 12 VDC Nylube 92db .15 mA
MIS-125N	<b>Alarm Bell</b> , 6" 6 VDC Nylube 92db .15 mA
MIS-125Q	<b>Alarm Bell</b> , 6" 6 VDC 92db .15 ma black Bell
1000-02-10EPCO	<b>Alarm Bell</b> , 12V bell, 6
1000-03-10EPCO	<b>Alarm Bell</b> , 6V bell, 6
1000-04-10EPCO	<b>Alarm Bell</b> , 24V bell, 6



MIS-125M



MIS-125Q



1000-03-10



1000-04-10

### Gongs

S.E.E.S. #	Description
MIS-125	<b>Brass Gong</b> , 2-1/2" diameter, single stroke, 115 VAC
MIS-125A	<b>Brass Gong</b> , 2-1/2" diameter, single stroke, 40 Watt Series
MIS-125B	<b>Brass Gong</b> , 2-1/2" diameter, single stroke, 25 Watt Series
MIS-125-48VDC	<b>Brass Gong</b> , 2-1/2" diameter, single stroke, 48 VDC

■ See also Car Signal Components listed by elevator manufacturer for additional gongs.



MIS-125





MIS-901



MIS-901AM



MIS-901A



MIS-901G



MIS-901R



MIS-197



MIS-197A



MIS-901B



MIS-902



MIS-901H



MIS-901J



MIS-903



MIS-904

## Fans

S.E.E.S. #	O.E.M. #	Description
MIS-901		<b>Exhaust Fan</b> , 2 speed, round, 120V, 10" O.D. Fan motors are sealed, self lubricating and rubber mounted to housing for quiet dependable service.
MIS-901A		<b>Exhaust Fan</b> , one or two speed exhaust fan 10" Square
MIS-901B		<b>Exhaust Fan</b> , 2 speed, round, Low Profile 12" D 5" deep for cab
MIS-901C		<b>Exhaust Fan</b> , Two speed with adaptor (up to 15")
MIS-901E		<b>Exhaust Fan</b> , 3 Speed Enclosed For High speed Elev 400CFM Flow
MIS-901F		<b>Exhaust Fan</b> , Dual 3 Spd 120 VAC High Spd Elev 800CFM Air Flow
MIS-901G	XF12VDC	<b>Exhaust Fan</b> , 12V Emergency Backup Operates At 80 Degrees On 6 VDC
MIS-901H	NYPS-4	<b>Power Supply</b> , Emergency Exh 2hrs Of Power, Used with MIS-901G
MIS-901J	NYPS-8	<b>Power Supply</b> , Emergency Exh 4hrs Of Power, Used with MIS-901G
MIS-901AM		<b>Motor</b> , replacement fan for MIS-901A
MIS-901R	9853194	<b>Fan</b> , Rotron fan rack mount 5.22" H 19" W x 13.70" Deep
MIS-902		<b>Adapter</b> for exhaust fan. Allows installation of todays high performance fan models to replace older, larger diameter units. Adapter plate measures 15" sq. with 10" diameter mounting hole.
MIS-903		<b>Grill</b> for exhaust fan. White enamel 14" O.D. for MIS-900 or MIS-901 fans. Heavy duty welded steel.
MIS-904		<b>Grill</b> for exhaust fan. Chrome - #4 stainless steel 14" O.D. for MIS-901 fans. Heavy duty welded steel delivers high performance with low air flow restriction.

## Emergency Ceiling Exit Switches

S.E.E.S. #	O.E.M. #	Description
MIS-197		<b>Ceiling Emergency Latch Switch</b> , DPDT Switch allows for building security circuit to be notified, as well as separate circuit for car shut down or, as code requires. Requires manual latch reset from car top.
MIS-197A	AAA6098NS1	<b>Top of Car Exit</b> , contact kit, plug type
MIS-197B	USP18576	<b>Emergency Ceiling Exit</b> , Switch Assembly, Car Top Escape
MIS-197C	9768547	<b>Emergency Ceiling Exit</b> , Switch Assembly, ThyssenKrupp
MIS-197D	6993C64G03	<b>Emergency Ceiling Exit</b> , Switch Assembly, Westinghouse
MIS-197E	321C984G01	<b>Emergency Ceiling Exit</b> , Switch Kit, Westinghouse



MIS-197B



MIS-197C

## Electric Door Latch Assembly

S.E.E.S. #	O.E.M. #	Description
MIS-914A	A835A3	<b>Electric Door Restrictor Hatch Latch Assembly</b>
MIS-194-AB	A835BT	<b>Battery, 12 V 2.9 AMP HR.</b>
MIS-914B	A835PL	<b>Plunger, Replacement for MIS-914A</b>
MIS-914C	A835PC4	<b>PCB, Hatch Latch, replacement for MIS-914A</b>
MIS-914D	636101	<b>Door Restrictor, Electronic Door Restrictor, Safe Exit</b>
MIS-914F	A835PH	<b>PhotoEye, with bracket and 9ft cable for Hatch Latch</b>
MIS-914G	A835SYSBK	<b>Solenoid, with 9ft cable and bracket for Hatch Latch</b>
MIS-914H	A835S1	<b>Solenoid, with 9ft cable and bracket for Hatch Latch</b>
MIS-914I	A835SBA3	<b>Solenoid Mounting Bracket, for Hatch Latch</b>
MIS-914J	A835ZC	<b>Solenoid Plunger Bracket, Z-bracket for Hatch Latch</b>
MIS-914-T		<b>Reflective Targets, Alum Plate with 4" x 18" Reflective Tape</b>
MIS-914L	A835RA	<b>Reflective Angle, for Hatch Latch</b>
MIS-914M	A835BB	<b>Bracket, stop 7GA 5" x 10" for Hatch Latch</b>
MIS-914N	A835OPTO	<b>Door Open Pilot, OPTO Module for Hatch Latch</b>
MIS-914-TAPE		<b>Reflective Tape, 2" wide roll of 10 ft</b>



MIS-914A




MIS-194-AB



MIS-914D



MIS-914B



MIS-914C



MIS-914F



MIS-914-TAPE



MIS-914M



MIS-914-BK-2SLH



MIS-914-BK-2SRH



MIS-914-PCB



MIS-916




PEND-3B



PEND-3B-LEG



SEES-TOCI-001



## Electric Door Latch Assembly

S.E.E.S. #	O.E.M. #	Description
MIS-914A	A835A3	<b>Electric Door Restrictor Latch Assembly</b> , Hatch
MIS-914B	A835PL	<b>Plunger</b> , Replacement for MIS-914A
MIS-914C	A835PC4	<b>PCB</b> , Hatch Latch, replacement for MIS-914A
MIS-914D	636101	<b>Door Restrictor</b> , Electronic Door Restrictor, Safe Exit
MIS-914E	A835MC	<b>Money Clip</b> , for hatch latch for MIS-914A
MIS-914F	A835PH	<b>PhotoEye</b> , with bracket and 9ft cable for Hatch Latch
MIS-914G	A835SYSBK	<b>Solenoid</b> , with 9ft cable and bracket for Hatch Latch
MIS-914H	A835S1	<b>Solenoid</b> , with 9ft cable and bracket for Hatch Latch
MIS-914I	A835SBA3	<b>Solenoid Mounting Bracket</b> , for Hatch Latch
MIS-914J	A835ZC	<b>Solenoid Plunger Bracket</b> , Z-bracket for Hatch Latch
MIS-914L	A835RA	<b>Reflective Angle</b> , for Hatch Latch
MIS-914M	A835BB	<b>Bracket</b> , stop 7GA 5" x 10" for Hatch Latch
MIS-914N	A835OPTO	<b>Door Open Pilot</b> , OPTO Module for Hatch Latch
MIS-914BK		<b>Stop Bracket</b> , for MIS-914 with hardware
MIS-914-BK-2SLH		<b>Stop Bracket</b> , for MIS-914 2SP, L.H. with Hardware
MIS-914-BK-2SRH		<b>Stop Bracket</b> , for MIS-914 2SP, R.H. with Hardware
MIS-914PE		<b>Photo Eye</b> , replacement with cable
MIS-914PS		<b>Plunger Solenoid Assembly</b> , with cable
MIS-914M	A835BB	<b>Bracket</b> , stop 7GA 5" x 10" for hatchlatch
MIS-914-BAT		<b>Battery</b> , 12V, 2.5AH replacement for MIS-914
MIS-914-PEK		<b>Photo Eye Kit</b> , with sensor cable, bracket and tape
MIS-914-POW		<b>Rear Door Kit</b> , for SEES Electro-Strictor
MIS-914-SOL		<b>Plunger Solenoid Assembly</b> , only no cable
MIS-914-TAPE		<b>Reflective Tape</b> , 2" wide roll of 10 ft
MIS-914-PCB		<b>PCB Replacement</b> , for MIS-914
MIS-915	9894433	<b>Tool</b> , Taper pin extractor
MIS-916		<b>Power Supply</b> , Universal, #OTIS50E-EE
MIS-917		<b>Power Supply</b> , Bench, 3 Outputs
MIS-918		<b>Power Supply</b> , 220 VAC

## Pendant Station Parts

S.E.E.S. #	O.E.M. #	Description
PEND-3B	M1-300-309	<b>Control 3 Button</b> , Start, Stop, Enable
PEND-3B-LEG	D7-18BE165	<b>Legend</b> , 50mm, Black, Off/On

## Car Top Inspection

S.E.E.S. #	O.E.M. #	Description
SEES-TOCI-001	TCIG-A	<b>Top of Car Inspection Station</b> , 6V Bell 120V Fire LED/Buzzer, GFCI, Lamp & Guard
SEES-TOCI-001A	TCIG-A24	<b>Top of Car Inspection Station</b> , 6V Bell 24V Fire LED/Buzzer, GFCI, Lamp & Guard
SEES-TOCI-002	TCIG-A120	<b>Top of Car Inspection Station</b> , 120V Bell 120V Fire LED/Buzzer, GFCI, Lamp & Guard
SEES-TOCI-002A		<b>Top of Car Inspection Station</b> , 120V Bell 24V Fire LED/Buzzer, GFCI, Lamp & Guard
SEES-TOCI-003		<b>Top of Car Inspection Station</b> , 12V Bell 120V Fire LED/Buzzer, GFCI, Lamp & Guard
SEES-TOCI-003A		<b>Top of Car Inspection Station</b> , 12V Bell 24V Fire LED/Buzzer, GFCI, Lamp & Guard



## Car Top Inspection

S.E.E.S. #	Description
MIS-910A	Inspection Station, Car Top 6V with Alarm Bell, GFCI & Lamp Guard
MIS-910B	Inspection Station, 12V Alarm GFCI & Metal Lmp Guard, CSA
MIS-910C	Inspection Station, 24V Alarm GFCI & Metal Lmp Guard, CSA
MIS-910D	Inspection Station, 120V Alarm GFCI & Metal Lmp Guard, CSA
MIS-911B	Inspection Station, for Car Bo GFCI
MIS-147	Lamp Guard, metal clamp on guard for Car Top Inspection Station
MIS-147A	Lamp Guard, for Car Top Inspection ION/Plastic, 109789



MIS-147

S.E.E.S. #	O.E.M. #	Description
TCTI-001	9890531	Thyssen Car Top Inspection Station

S.E.E.S. #	Description
SEES-TOCH-001A	TOCH, 6Front Opening 45"-70" W x 35"-50" D
SEES-TOCI-001-FLK	Top of Car Inspection Station, Kit 6V Bell 120V Fire LED/Buzzer, GFCI, Lamp & Guard, Flex Light Bulb
SEES-TOCI-001A	Top of Car Inspection Station, 6V Bell 24V Fire LED/Buzzer, GFCI, Lamp & Guard
SEES-TOCI-001A-FLK	Top of Car Inspection Station, Kit 6V Bell 24V Fire LED/Buzzer, GFCI, Lamp & Guard, FLex Light & Bulb
SEES-TOCI-002	Top of Car Inspection Station, 120V Bell 120V Fire LED/Buzzer, GFCI, Lamp & Guard
SEES-TOCI-002-FLK	Top of Car Inspection Station, Kit 120V Bell 120V Fire LED/Buzzer, GFCI, Lamp & Guard, Flex Light&Bulb
SEES-TOCI-002A	Top of Car Inspection Station, 120V Bell 24V Fire LED/Buzzer, GFCI, Lamp & Guard
SEES-TOCI-002A-FLK	Top of Car Inspection Station, Kit 120V Bell 24V Fire LED/Buzzer, GFCI, Lamp & Guard, Flex Light & Bulb
SEES-TOCI-003	Top of Car Inspection Station, 12V Bell 120V Fire LED/Buzzer, GFCI, Lamp & Guard
SEES-TOCI-003-FLK	Top of Car Inspection Station, Kit 12V Bell 120V Fire LED/Buzzer, GFCI, Lamp & Guard, Flex Light & Bulb
SEES-TOCI-003A	Top of Car Inspection Station, 12V Bell 24V Fire LED/Buzzer, GFCI, Lamp & Guard
SEES-TOCI-003A-FLK	Top of Car Inspection Station, 12V Bell 24V Fire LED/Buzzer, GFCI, Lamp & Guard, Flex Light & Bulb
MIS-147B-P	Car Top Light, magnetic base with flex neck & 25ft cord with plug
MIS-147B	Car Top Light, magnetic base with flex neck & 25ft cord




MIS-147A



TOCI-LF

S.E.E.S. #	Description
TOCI-L	Top of Car Inspection Box, with GFCI receptacle and light fixture/cage
TOCI-LF	Top of Car Inspection Box, with GFCI receptacle, light fixture/cage and fire service light/buzzer indicators
TOCI-LA	Top of Car Inspection Box with GFCI receptacle, light fixture/cage and audible 6 - 28 VDC alarm
TOCI-LFA	Top of Car Inspection Box with GFCI receptacle, light fixture/cage, fire service light/buzzer indicators

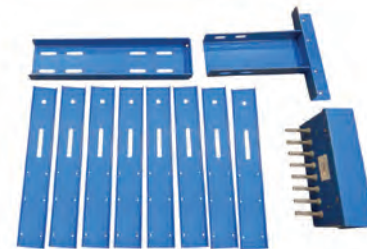

SEES-TLS-001

## SEES Terminal Limit Switch

S.E.E.S. #	Description
SEES-TLS-001	SEES Terminal Limit Switch Assembly, Universal
SEES-TLS-002	SEES Terminal Limit Switch Assy, Universal (14 Switches)



EPP-001



EPP-001A




EFP-120C



EFP-120B



SEES-EQM-001



EFP-120P



MIS-630



MIS-631


 SEES-PTG-36-036  
TO  
SEES-PTG-36-048

## Universal Power Supply for Emergency Lighting

S.E.E.S. #	O.E.M. #	Description
EPP-001	1000-02-01	<b>Power Supply</b> , 12V power pack
EPP-002	1000-02-02	<b>Power Supply</b> , 12V power pack with light fixture
EPP-003	1000-02-03	<b>Power Supply</b> , 12V power pack with bell
EPP-004	1000-02-04	<b>Power Supply</b> , 12V power pack with light fixture, bell & GFI
EPP-001A	1000-03-01	<b>Power Supply</b> , 6V power pack
EPP-002A	1000-03-02	<b>Power Supply</b> , 6V power pack with light fixture
EPP-003A	1000-03-03	<b>Power Supply</b> , 6V power pack with bell
EPP-004A	1000-03-04	<b>Power Supply</b> , 6V power pack with light fixture, bell & GFI
6V-GB	6V GB	<b>Gell Board</b> , 6V Power supply
6V-GB-KIT		<b>Kit</b> , PCB and Battery for 6V Gell Pack
6V-GB-PCB		<b>PCB</b> , Replacement for 6V Gell Pack
12V-GB	12V GB	<b>Gell Board</b> , 12V Power supply
12V-GB-KIT		<b>Kit</b> , PCB and Battery for 12V Gell Pack
12V-GB-PCB		<b>PCB</b> , Replacement for 12V Gell Pack
EFP-120B	EFP-120B	<b>Flexlite</b> , PC Board
EFP-120C	EFP-120C	<b>Flexlite</b> , Charger unit
EFP-120P	EFP-120P	<b>Flexlite</b> , Power pack
MIS-194G		<b>Battery</b> , 6V battery used in power packs, 2 in 12V

## Earthquake Detection

S.E.E.S. #	O.E.M. #	Description
SEES-EQM-001	EQ-PQM3000	<b>SEES</b> , Earthquake monitor
MIS-630		<b>Electronic Seismic Sensor / Amp Assembly</b>
MIS-194AC		<b>Battery</b> , 6 VDC, for Draka, Seismic Sensor
MIS-631	SS04E	<b>Seismic Elevator Switch</b> , Loadtech for elevator and escalator protection

## Platform Guards / Toe Guards


S.E.E.S. #	Description
SEES-PTG-36-036	<b>Guard</b> , Platform / Toe / Apron for 36" opening, Actual 38" x 36"
SEES-PTG-36-038	<b>Guard</b> , Platform / Toe / Apron for 36" opening, Actual 38" x 38"
SEES-PTG-36-040	<b>Guard</b> , Platform / Toe / Apron for 36" opening, Actual 38" x 40"
SEES-PTG-36-042	<b>Guard</b> , Platform / Toe / Apron for 36" opening, Actual 38" x 42"
SEES-PTG-36-044	<b>Guard</b> , Platform / Toe / Apron for 36" opening, Actual 38" x 44"
SEES-PTG-36-046	<b>Guard</b> , Platform / Toe / Apron for 36" opening, Actual 38" x 46"
SEES-PTG-36-048	<b>Guard</b> , Platform / Toe / Apron for 36" opening, Actual 38" x 48"
SEES-PTG-42-036	<b>Guard</b> , Platform / Toe / Apron for 42" opening, Actual 44" x 36"
SEES-PTG-42-038	<b>Guard</b> , Platform / Toe / Apron for 42" opening, Actual 44" x 38"
SEES-PTG-42-040	<b>Guard</b> , Platform / Toe / Apron for 42" opening, Actual 44" x 40"
SEES-PTG-42-042	<b>Guard</b> , Platform / Toe / Apron for 42" opening, Actual 44" x 42"
SEES-PTG-42-044	<b>Guard</b> , Platform / Toe / Apron for 42" opening, Actual 44" x 44"
SEES-PTG-42-046	<b>Guard</b> , Platform / Toe / Apron for 42" opening, Actual 44" x 46"
SEES-PTG-42-048	<b>Guard</b> , Platform / Toe / Apron for 42" opening, Actual 44" x 48"
SEES-PTG-48-030	<b>Guard</b> , Platform / Toe / Apron for 48" opening, Actual 50" x 30"
SEES-PTG-48-036	<b>Guard</b> , Platform / Toe / Apron for 48" opening, Actual 50" x 36"
SEES-PTG-48-038	<b>Guard</b> , Platform / Toe / Apron for 48" opening, Actual 50" x 38"
SEES-PTG-48-040	<b>Guard</b> , Platform / Toe / Apron for 48" opening, Actual 50" x 40"
SEES-PTG-48-042	<b>Guard</b> , Platform / Toe / Apron for 48" opening, Actual 50" x 42"
SEES-PTG-48-044	<b>Guard</b> , Platform / Toe / Apron for 48" opening, Actual 50" x 44"
SEES-PTG-48-046	<b>Guard</b> , Platform / Toe / Apron for 48" opening, Actual 50" x 46"
SEES-PTG-48-048	<b>Guard</b> , Platform / Toe / Apron for 48" opening, Actual 50" x 48"
SEES-PTG-STRUT	<b>Strut</b> , for Toe Guard

## SEES Selector

S.E.E.S. #	O.E.M. #	Description
SEES-SELECTOR-001	IP READER	<b>Selector, Assembly</b>
SEES-SELECTOR-001-PCB		<b>Selector Replacement PCB</b>
SEES-SELECTOR-003	IP MOUNTING KIT	<b>Selector, Mounting Kit</b>
SEES-SELECTOR-MAG-001	IP8300-LSM-DZ	<b>Selector, Door Zone Magnet 1 Per Floor</b>
SEES-SELECTOR-MAG-001K	IP8300-LSM-KIT	<b>Selector, Door Zone Magnet 1 Per Elevator</b>
SEES-SELECTOR-TAPE-001		<b>SEES Selector Tape, 3"</b>
SEES-SELECTOR-TG-001		<b>SEES Selector Tape Guide, 3 hole with thumbscrew</b>
STG-001		<b>Tape Guide, CEC-Swift</b>
ES-001	9745312	<b>Vane Magnetic Selector Tape, ELGO Selectors, Absolute Positioning for Dover/Thyssen</b>



SEES-SELECTOR-001

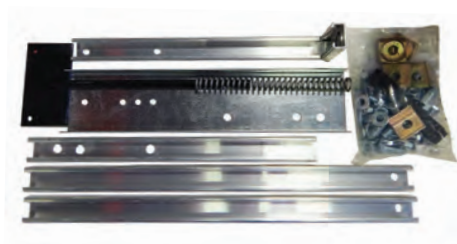


SEES-SELECTOR-003



SEES-SELECTOR-MAG-001



SEES-SELECTOR-TAPE-001



SEES-SELECTOR-TG-001



STG-001






# BARRICADE SALE!



- ✓ LIGHT AND PORTABLE
- ✓ PREVENTS ACCIDENTS
- ✓ EASY TO USE AND CLEAN
- ✓ RUGGED CONSTRUCTION

 **CALL NOW: 800.526.0026**

## UNBEATABLE SAVINGS!

### BARR-001A

36" W X 42" H panel, 10mm thick

LIST: ~~\$28~~  
SALE PRICE: \$22



### BARR-003

(3) 36" W x 42" H panels, 10mm thick, with anchors and (2) locks

LIST: ~~\$140~~  
SALE PRICE: \$110



### BARR-004

(4) 36" W x 42" H panels, 10mm thick, with anchors and (3) locks

LIST: ~~\$175~~  
SALE PRICE: \$140

